



- TASTE THE DIFFERENCE -

## MODEL GEN-5400

This extreme-volume 2-flavor soft serve freezer is perfect for serving lots of product in a short amount of time! Features the GEN-5400 Genesis Series™ with the Virtual Quality Management System™ to streamline your business. Includes a front-loading refrigerated cabinet with a high speed pump. Our pressurized machines consistently produce smooth and creamy high and low fat products like ice cream, custard, yogurt and sorbets. Excellent for full-menu ice cream and custard stores, sports arenas & stadiums.

### The Electro Freeze Advantage

- **Virtual Quality Management System™** monitors Temperature and Consistency to provide superior taste and quality.
- **Patented Mix Transfer System\*** simplest and most reliable pressurized system available.
- **Flexible Mix Holding System Pumps** directly from bags or from mix containers
- **Innovative Solutions** providing the Best product quality in the industry.
- **Meets ADA Specifications** for self service applications
- **Multi-function LED** display with manager smart tools.
- **The Finest Frozen Product**, consistently the best frozen product available. Smooth, creamy and profitable.
- **Self Closing Spigots** prevents the mess and eliminates waste
- **Exclusive Auger Design** Superior low temperature refrigeration system provides the best in class production and product quality.
- **Energy Conservation Mode** reduces energy cost and holds product safely during non-business hours
- **Superior Low Temperature Refrigeration System** provides the best in class production and product quality
- **Scroll Compressor Technology** provides increased capacity, reliability and efficiency.

## SOFT SERVE FREEZER GENESIS SERIES™

2 Flavor Twist

featuring




VQM™

Virtual Quality  
Management System™



Let VQM help manage your frozen  
dessert business more effectively.

# GEN-5400 Soft Serve Freezer

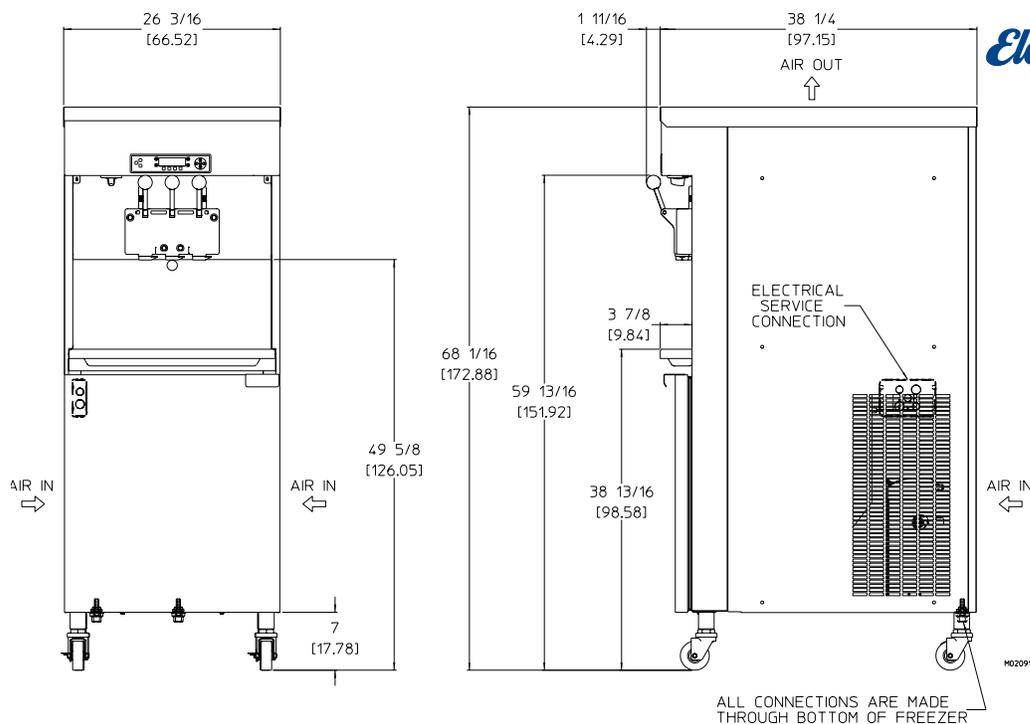

## MODEL GEN-5400 SPECIFICATIONS

Due to continual product improvements all specifications are subject to change without notice.

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>		
Net	914	414		
Crated	1015	460		
	<b>cu.ft.</b>	<b>cu.m.</b>		
Volume	58.42	1.65		
<b>Dimensions</b>	<b>in.</b>	<b>cm</b>		
Width	26-3/16	66.52		
Depth	38-1/4	97.15		
Height	68-1/16	172.88		
<b>Electrical</b>	<b>Maximum Fuse Size</b>	<b>Minimum Ampacity</b>	<b>Circuit (Qty)</b>	<b>NEMA Plug Type</b>
208-230/60/1 Air	35 (2)	29 (2)		2P, 2W
208-230/60/1 Water	35 (2)	27.5 (2)		2P, 2W
208-230/60/3 Air	25 (2)	20 (2)		3P, 3W
208-230/60/3 Water	25 (2)	19 (2)		3P, 3W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

### Bidding Spec

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_

Cooling: \_\_\_\_\_ Neutral \_\_\_\_\_ Yes \_\_\_\_\_ No

Options: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

### Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

### Beater Motor

Two, 2hp.

### Refrigeration Systems

Two, 19,000 Btuh. R404a.  
Separate Cabinet Refrigeration, One, 1200 Btuh, R134a.  
Btuh may vary depending on compressor used.

### Air Cooled

For proper air circulation, unit requires 6" (15.2 cm) air space at rear panel or at both side panels and 24" (61 cm) air space above unit.

**Mix Hopper Capacity:** two - 24 quarts (22.2 liters) each

**Freezing Cylinder Capacity:** two - 5 quarts (4.7 liters) each

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



### Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois 61244 USA  
Phone (309) 755-4553 • (800) 755-4545  
FAX (309) 755-9858  
E-mail: sales@electrofreeze.com • www.electrofreeze.com

### Authorized Distributor