



MODEL GEN-5200

PRESSURIZED SOFT SERVE FREEZER

FEATURES

This single barrel high-capacity, pressurized soft serve freezer is engineered for extreme-volume operations while delivering premium-quality product.

Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Long Lasting Scraper Blades

Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Innovative Auger Technology

Gently blends for optimal texture and consistency.

Scroll Compressor Technology

Increases capacity, reliability, and efficiency; making your operation more efficient and cost-effective.

Superior Low Temperature Refrigeration System

Industry-leading cooling technology maximizes production and product quality.

Standby Mode

Reduces energy costs while maintaining safe product storage during non-business hours.



PERFECT FOR

- Quick-Service Restaurants
- High-Volume Restaurants
- Amusement Park Kiosks
- Frozen Treat Shops




GEN-5200





MODEL GEN-5200 SPECIFICATIONS

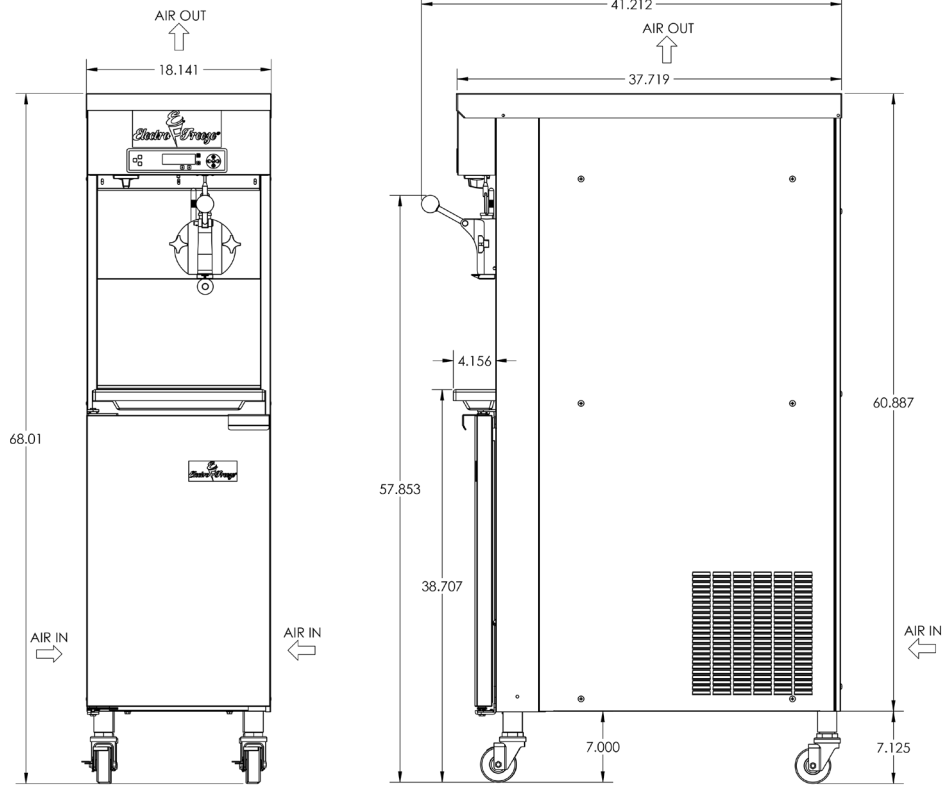

Weight

Net	530 lbs	240 kg
Crated	650 lbs	294 kg

Volume

58.42 cubic ft	1.65 cubic m
----------------	--------------

Dimensions

18.41" x 41.21" x 68.01"
45.76cm x 104.67cm x 172.74cm

Freezing Cylinder Capacity

One - 5 qts (4.7 liters)

Mix Tank Capacity

One - 30 qts (28.4 liters)

Refrigerant Types*

One, 10,000 Btuh
R404a R452a

Separate Cabinet Refrigerant

One, 1,200 Btuh
R134a

Beater Motor

Two - 2 hp

Electrical

	Max Fuse Size	Min Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1 Air	40	29	2P, 2W
208-230/60/1 Water	35	27.5	2P, 2W
208-230/60/3 Air	25	20	3P, 3W
208-230/60/3 Water	25	19	3P, 3W

Exterior Space Required

Air/Water Cooled/Air Cooled Remote : 6" (15.2 cm) air space required at rear panel or at both side panels for circulation

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13

*Customer is responsible for complying with local refrigeration regulations.



DISTRIBUTOR



LOCATOR