



MODEL GES-2080

PRESSURIZED SOFT SERVE & SHAKE FREEZER

FEATURES

Deliver large volumes of high-quality soft serve and shakes in one efficient footprint.

Exclusive Mixer Design

Simultaneously dispense and blend in flavors; reducing servicing times, improving efficiency, and ensuring consistency.

Premium Frozen Product

Delivers smooth, creamy, and consistently premium-quality product.

Pump Forward Design

Reduces cleaning time to minimize downtime and maximize efficiency.

Flexible Mix Holding System

Pumps mix directly from bags or containers for seamless operation.

Patented Mix Transfer System

The simplest and most reliable pressurized system available.

Long Lasting Scrapper Blades

Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Innovative Auger Technology

Gently blends for optimal texture and consistency.

Scroll Compressor Technology

Increases capacity, reliability, and efficiency for continuous service.




PERFECT FOR

- Quick-Service Restaurants
- High-Volume Franchises
- Multi-Unit Operations





MODEL GES-2080 SPECIFICATIONS

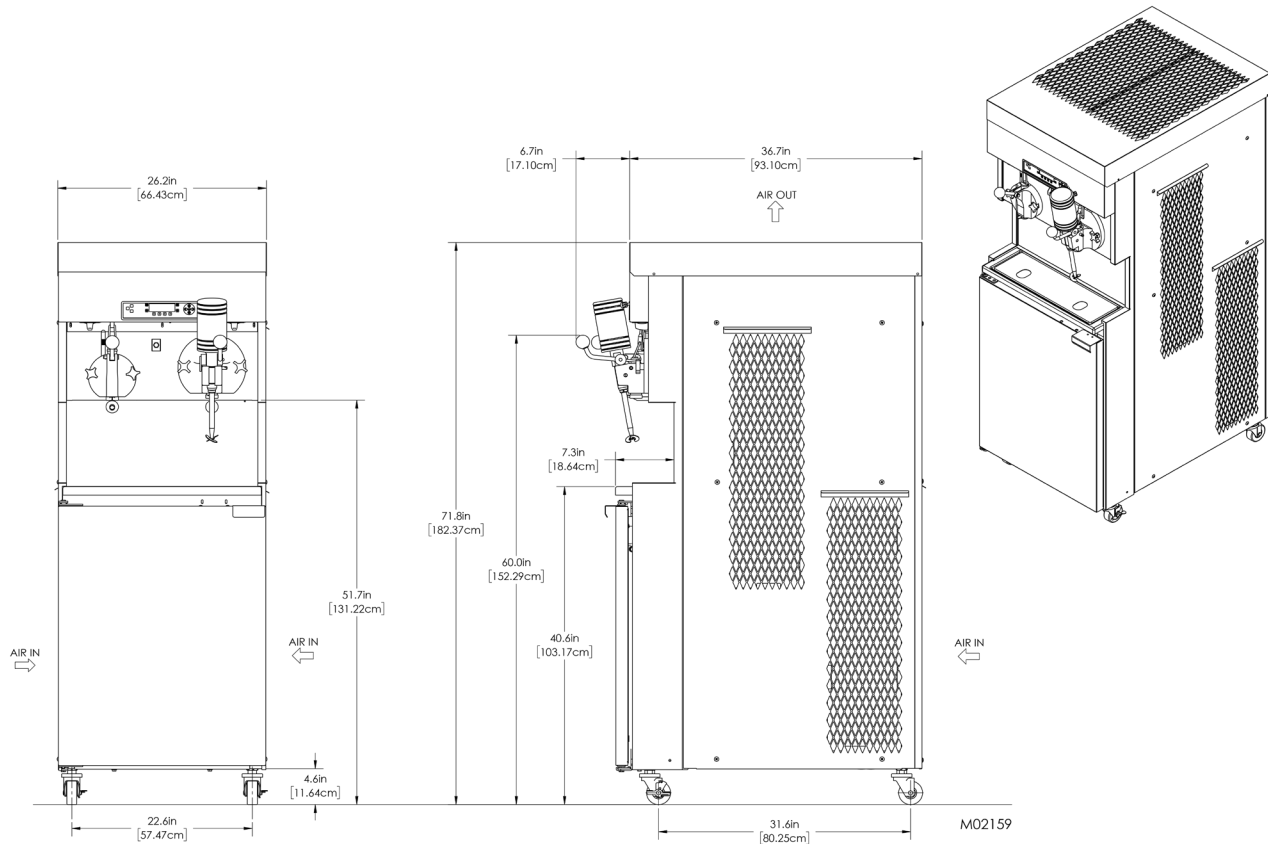

Weight

Net	852 lbs	386 kg
Crated	957 lbs	434 kg

Volume

58.42 cubic ft 1.65 cubic m

Dimensions

26-3/16" x 36-11/16" x 69-15/16"
66.43 cm x 93.18 cm x 177.64 cm

Freezing Cylinder Capacity

- One - 5 qts (4.3 liters) Soft Serve
- One - 10.5 qts (10.1 liters) Shake

Mix Tank Capacity

Two -26 qts (24.6 liters)

Refrigerant Types*

- One, 11,000 Btuh - Soft Serve
- One, 10,000 Btuh Shake
- R404a R452a

Separate Cabinet Refrigerant

- One, 1200 Btuh
- R134a

Beater Motor

- One - 2 hp Soft Serve
- One - 1-1/2 hp Shake

Electrical

	Max Fuse Size		Min Circuit Ampacity		Poles (P) Wires(W)
	Soft Serve	Shake	Soft Serve	Shake	
208-230/60/1 Air	35	30	27.5	24.5	2P, 2W
208-230/60/1 Water	35	30	25.5	23	2P, 2W
208-230/60/3 Air	25	20	19	17.5	3P, 3W
208-230/60/3 Water	20	20	17.5	16	3P, 3W

Exterior Space Required

Air Cooled : 6" (15.3 cm) air space required at rear panel or 6" (152.2 cm) side clearance with 1" (2.54 cm) back and 29" (73.66 cm) top clearance

Cerified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Candian Naitonal Standard C22.2 No. 120-13

*Customer is responsible for complying with local refrigeration regulations.



DISTRIBUTOR



LOCATOR