



# MODEL GES-5400 PRESSURIZED SOFT SERVE FREEZER

## FEATURES

This high-capacity soft serve freezer produces two independent flavors and a perfectly blended twist for added variety.

### Twist Feature

Dispenses two separate flavors or an equal combination of both; providing versatile menu options.

### Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

### Patented Mix Transfer System

The simplest and most reliable pressurized system available for consistent product flow.

### Flexible Mix Holding System

Pumps mix directly from bags or containers for seamless operation.

### Scroll Compressor Technology

Increases capacity, reliability, and efficiency for continuous service.

### Innovative Auger Technology

Gently blends for optimal texture and consistency.

### Long Lasting Scraper Blades

Durable reversible scraper blades minimizes replacements and ensures a smooth, consistent texture for premium-quality frozen treats.

### Standby Mode

Reduces energy costs while maintaining safe product storage during non-business hours.

### Pump Forward Design

Reduces cleaning time; minimizing downtime and maximizing efficiency.




## PERFECT FOR

- Custard Shops
- Sports Arenas
- Stadiums





# MODEL GES-5400 SPECIFICATIONS

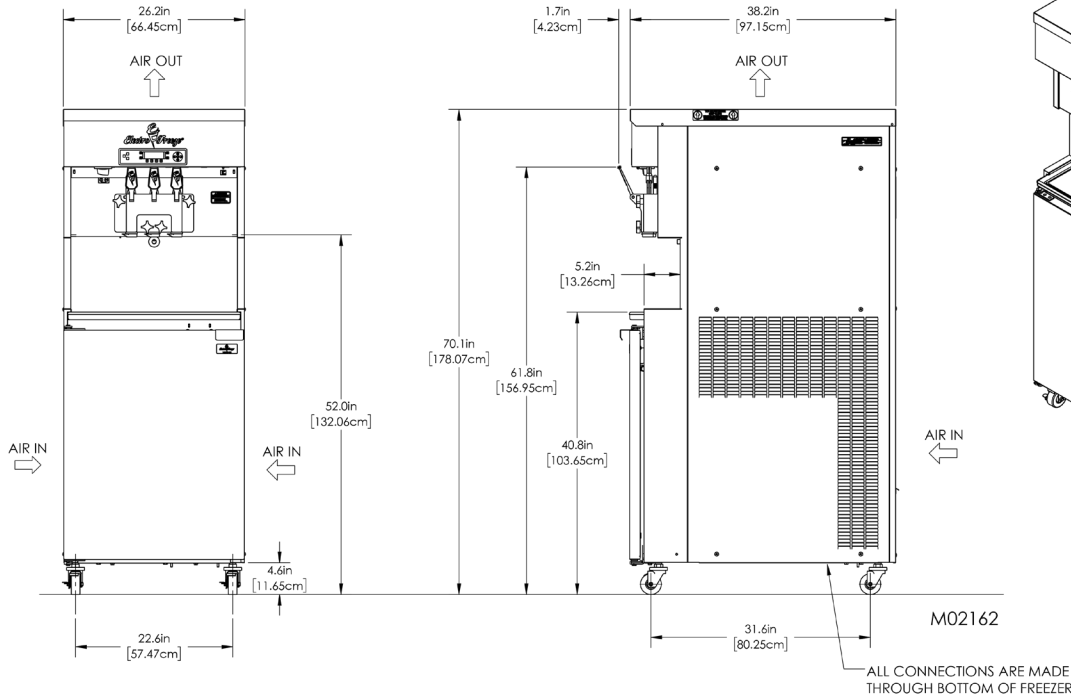

## Weight

Net	914 lbs	414 kg
Crated	1015 lbs	460 kg

## Volume

58.42 cubic ft 1.65 cubic m

## Dimensions

26.2" x 38.2" x 70"  
66.43cm x 97.15cm x 178.07cm

## Freezing Cylinder Capacity

Two - 5 qts (4.7 liters) each

## Mix Hopper Capacity

Two - 30 quarts (28.4 liters) each

## Refrigerant Types\*

Two, 11,000 Btuh  
R404a R452a

## Separate Cabinet Refrigerant

One, 1,200 Btuh  
R134a

## Beater Motor

Two, 2 hp

## Electrical

	Max Fuse Size (L/R)	Min Circuit Ampacity (L/R)	Poles (P) Wires(W)
208-230/60/1 Air	35/40	27.5/29	2P, 2W
208-230/60/1 Water	35/35	25.5/27.5	2P, 2W
208-230/60/3 Air	25/25	20 (2)	3P, 3W
208-230/60/3 Water	20/25	17.5/19	3P, 3W

## Exterior Space Required

**Air Cooled :** 6" (15.2 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

## Optional Features

**Remote Air Cooled System:** additional configuration required, contact Electro Freeze® for more information

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



DISTRIBUTOR



\*Customer is responsible for complying with local refrigeration regulations.