



MODEL GES-5420

PRESSURIZED SOFT SERVE FREEZER

FEATURES

Designed for peak performance, this pressurized soft serve freezer dispenses two separate flavors; making it ideal for busy operations where multiple team members can serve simultaneously.

Patented Mix Transfer System

The simplest and most reliable pressurized system available.

Flexible Mix Holding System

Pumps mix directly from bags or containers; adapting to your operation's needs.

Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Innovative Auger Technology

Gently blends for optimal texture and consistency.

Long Lasting Scraper Blades

Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Standby Mode

Reduces energy costs while safely holding product during non-business hours.

Scroll Compressor Technology

Increases capacity, reliability, and efficiency for continuous service.

Pump Forward Design

Reduces cleaning time; minimizing downtime and maximizing efficiency.




PERFECT FOR

- High-Volume Cafeterias
- Restaurants
- Ice Cream Shops
- Stadiums





MODEL GES-5420 SPECIFICATIONS

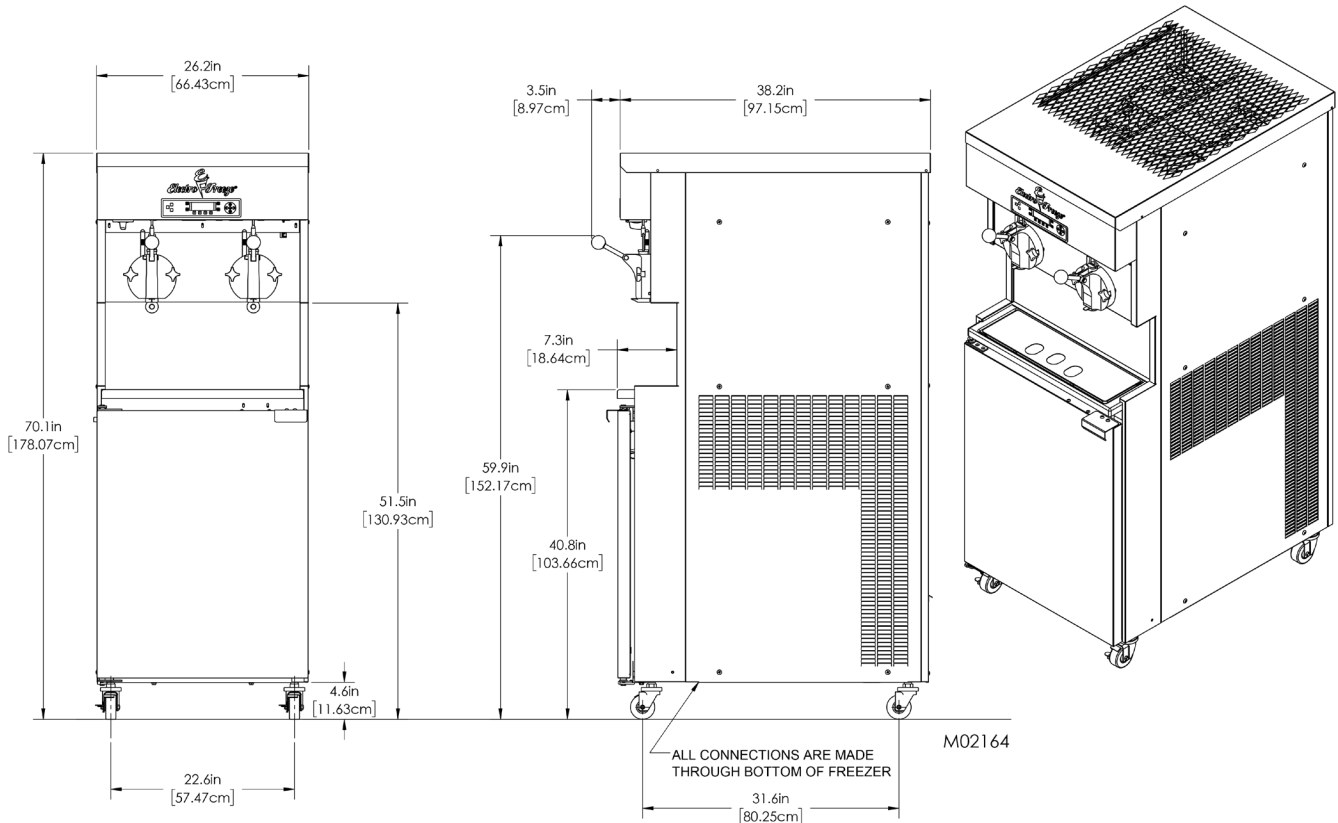

Weight

Net	914 lbs	414 kg
Crated	1015 lbs	460 kg

Volume

58.42 cubic ft 1.65 cubic m

Dimensions

26.2" x 38.2" x 70.1"

66.43cm x 97.15cm x 178.07cm

Freezing Cylinder Capacity

Two - 5 qts (4.7 liters) each

Mix Hopper Capacity

Two - 30 quarts (28.4 liters) each

Refrigerant Types*

Two, 11,000 Btuh

R404a R452a

Separate Cabinet Refrigerant

One, 1,200 Btuh

R134a

Beater Motor

Two, 2 hp

Electrical

	Max Fuse Size (L/R)	Min Circuit Ampacity (L/R)	Poles (P) Wires(W)
208-230/60/1 Air	35/40	27.5/29	2P, 2W
208-230/60/1 Water	35 A	25.5/27.5	2P, 2W
208-230/60/3 Air	25/25	19/20	3P, 3W
208-230/60/3 Water	20/25	17.5/19	3P, 3W

Exterior Space Required

Air Cooled : 6" (15.2 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

Cerified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Candian Naitonal Standard C22.2 No. 120-13

*Customer is responsible for complying with local refrigeration regulations.



DISTRIBUTOR

