



MODEL CS600

GRAVITY SOFT SERVE FREEZER

FEATURES

This powerful, single-flavor soft serve freezer is designed for efficiency, reliability, and seamless operation.

Versatile Menu

Serve quality soft serve, custards, yogurts, and sorbets at a high-capacity.

Easy to Operate and Clean

Designed for reliability to minimize downtime.

Precision Consistency Control

Designed to dispense quality product consistently.

Washable Air Filter

Keeps the condenser clean for optimal performance.

Compact, Space-Saving Design

A perfect fit for any foodservice operation.

Innovative Auger Technology

Gently blends to preserve texture, consistency, and quality.

Long Lasting Scraper Blades

Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

Standby Mode

Reduces energy costs while safely holding product during non-business hours.



Optional Cart



PERFECT FOR


- Convenience Stores
- Coffee Shops
- Ice Cream Stores
- Burger Restaurant
- Diners
- Kiosks



CS600



MODEL CS600 SPECIFICATIONS

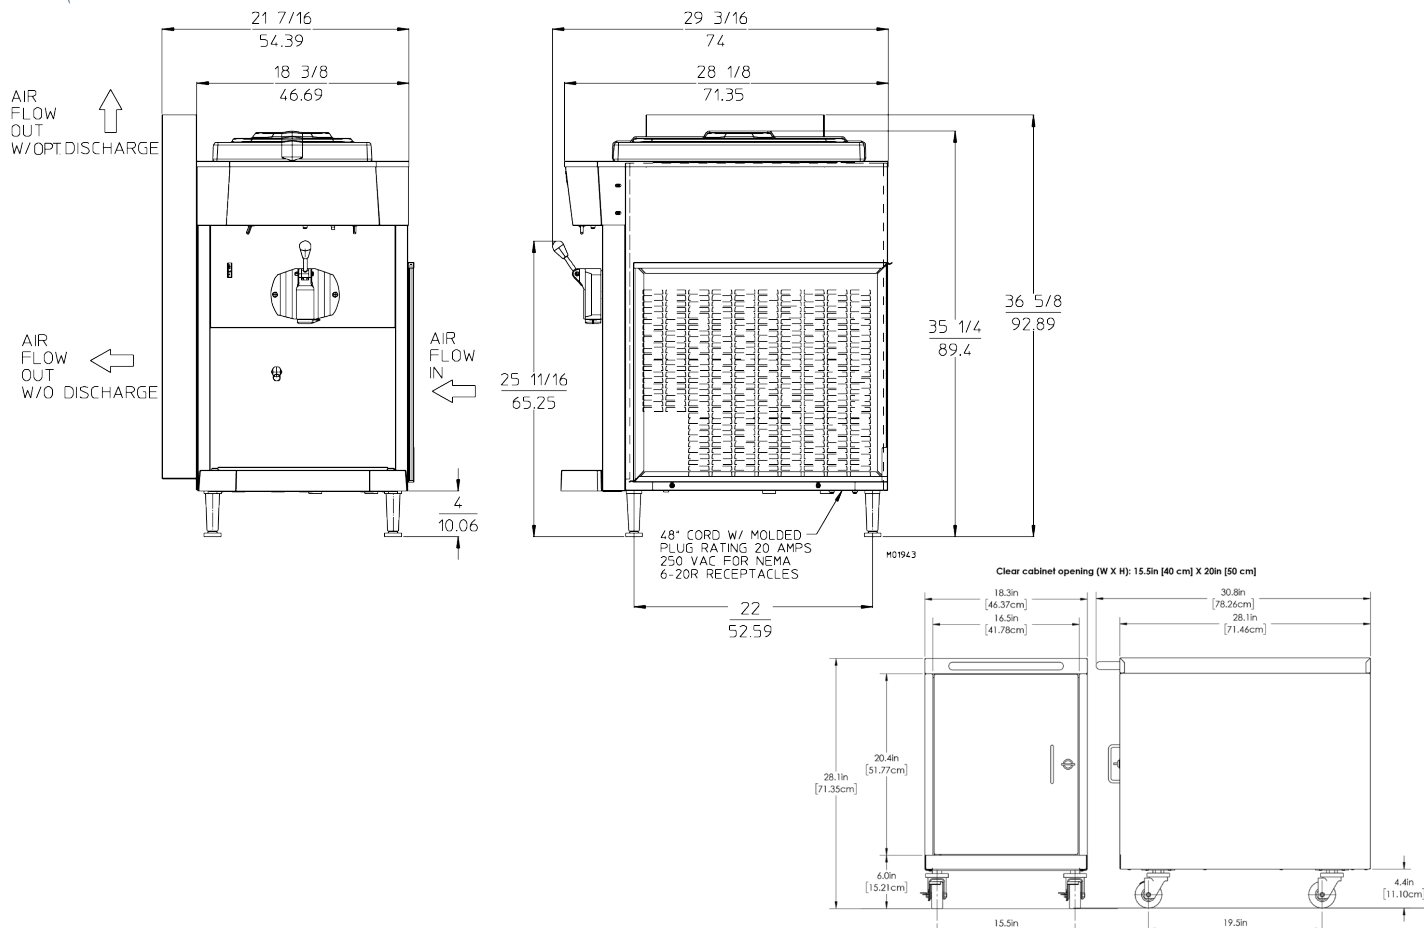

Weight

Net	260 lbs	117.9 kg
Crated	386 lbs	175.1 kg

Volume

39.5 cubic ft	1.2 cubic m
---------------	-------------

Dimensions

21-7/16" x 28-1/8" x 36-5/16"
54.39cm x 74cm x 92.89cm

Mix Hopper Capacity

One - 20 qts (18.8 liters) each

Freezing Cylinder Capacity

One - 3.7 qts (3.5 liters) each

Beater Motor- Qty, hp

One, 1.5hp

Refrigerant Types*

One, 9500 Btuh
R404a R452a

*Customer is responsible for complying with local refrigeration regulations.

Electrical

	Max Fuse Size	NEMA Plug Type	
208-230/60/1 Air	20	6-20 P	
209-230/60/1 Water	20	6-20 P	
	Total Amps (qty)	kW	Poles (P) Wires(W)
220-240/50/1 Air	12	1.78	2P 2W

Exterior Space Required

Air Cooled: 3" (7.6 cm) air space required on both sides & rear panel for circulation

Optional Features

Top Air Discharge Chute: allows air flow to divert upward

Cabinet: commercial grade stainless steel with heavy duty casters, a sturdy latch and 6 cubic feet of storage

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13

**Selected voltages only. Contact Electro Freeze® / H.C. Duke to verify agency needs



DISTRIBUTOR



LOCATOR