



# MODEL CS700 GRAVITY SHAKE FREEZER

## FEATURES

**This countertop shake freezer comes in a compact footprint while delivering outstanding product quality; making it perfect for high-demand environments.**

### **Easy to Operate and Clean**

Designed for reliability to minimize downtime.

### **Innovative Auger Technology**

Gently blends to preserve texture, consistency, and quality.

### **Washable Air Filter**

Keeps the condenser clean for optimal performance.

### **Compact, Space-Saving Design**

A perfect fit for any foodservice operation.

### **Precision Consistency Control**

Designed to consistently dispense quality product.

### **Long Lasting Scraper Blades**

Durable reversible scraper blades minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.



**Optional Cart**




## PERFECT FOR

- Amusement Park Kiosks
- Frozen Treat Shops
- High-Volume Restaurants
- Quick Service Restaurants





# MODEL CS700 SPECIFICATIONS

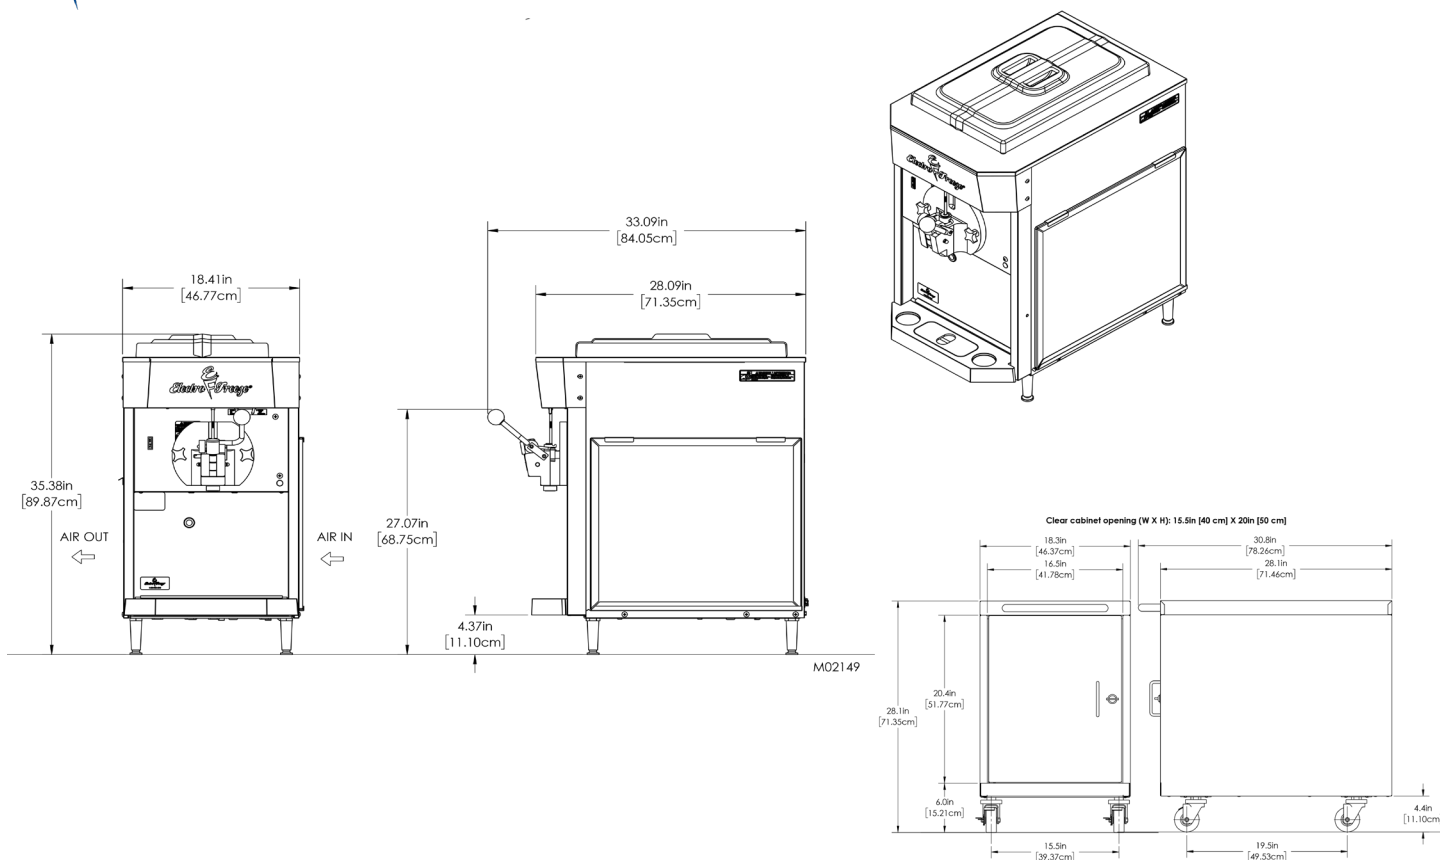

## Weight

|        |         |          |
|--------|---------|----------|
| Net    | 260 lbs | 117.9 kg |
| Crated | 356 lbs | 161.5 kg |

## Volume

|                |              |
|----------------|--------------|
| 39.47 cubic ft | 1.12 cubic m |
|----------------|--------------|

## Dimensions

|                             |
|-----------------------------|
| 18.41" x 33.09" x 35.38"    |
| 46.77cm x 84.05cm x 89.87cm |

## Mix Hopper Capacity

One - 20 qts (18.8 liters) each

## Freezing Cylinder Capacity

One - 7.6 qts (7.1 liters) each

## Beater Motor- Qty, hp

One, 1/2 hp

## Refrigerant Types\*

One, 8,000 Btuh  
R404a R452a

\*Customer is responsible for complying with local refrigeration regulations.

## Electrical

|                    | Max Fuse Size    |      | NEMA Plug Type     |
|--------------------|------------------|------|--------------------|
| 208-230/60/1 Air   | 20               |      | 6-20 P             |
| 209-230/60/1 Water | 20               |      | 6-20 P             |
|                    | Total Amps (qty) | kW   | Poles (P) Wires(W) |
| 220-240/50/1 Air   | 12               | 1.78 | 2P 2W              |

## Exterior Space Required

**Air Cooled:** 3" (7.6 cm) air space required on both sides & rear panel for circulation

## Optional Features

**Top Air Discharge Chute:** allows air flow to divert upward

**Cabinet:** commercial grade stainless steel with heavy duty casters, a sturdy latch and 6 cubic feet of storage

**Multiple Types of Blades:** provides desired consistencies from smooth creamy shakes to thick hand spun shakes.

## Front Mount Shake Mixer

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13

\*\*Selected voltages only. Contact Electro Freeze® / H.C. Duke to verify agency needs



DISTRIBUTOR



LOCATOR