



# MODEL GES-5099

## PRESSURIZED SOFT SERVE FREEZER

### FEATURES

Designed for peak performance, this pressurized soft serve freezer dispenses two separate flavors simultaneously—ideal for busy operations where multiple team members need to serve at once

#### Twist Feature

Dispenses two separate flavors or an equal combination of both, providing versatile menu options and enhancing your product offerings.

#### Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

#### Durable & Long Lasting Scraper Blades

Reversible scraper blades maximizes durability and minimizes replacements while ensuring a smooth, consistent texture for premium-quality frozen treats.

#### Innovative Auger Technology

Gently blends for optimal texture and consistency.

#### Standby Mode

Reduces energy costs while safely holding product during non-business hours.

#### Scroll Compressor Technology

Increases capacity, reliability, and efficiency, making your operation more efficient and cost-effective.

#### Pump Forward Design

Reduces cleaning time; minimizing downtime and maximizing efficiency.



### PERFECT FOR

- High-Volume Cafeterias
- Frozen Treat Shops
- Co-Branding
- Buffets




GES-5099





# MODEL GES-5099 SPECIFICATIONS

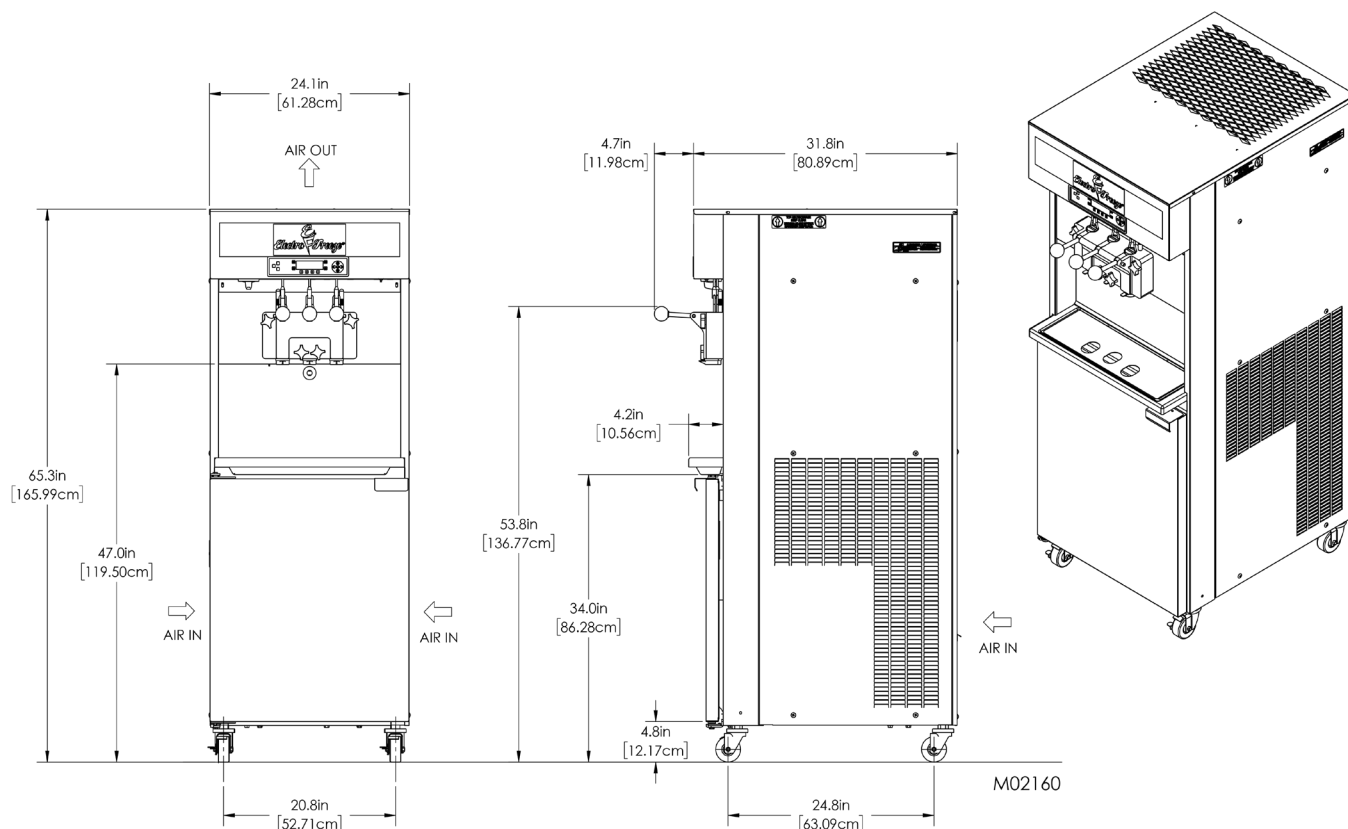

## Weight

|        |         |          |
|--------|---------|----------|
| Net    | 752 lbs | 341.1 kg |
| Crated | 808 lbs | 366.5 kg |

## Volume

58.42 cubic ft 1.65 cubic m

## Dimensions

24.1" x 31.8" x 65.3"

60.96 cm x 77.54 cm x 172.72 cm

## Freezing Cylinder Capacity

Two - 3.7 qts (3.5 liters) each

## Mix Capacity

Two - 22 quarts (20.8 liters) each

## Refrigerant Types\*

One, 10,000 Btuh

R404a R452a

## Separate Cabinet Refrigerant

One, 1,200 Btuh

R134a

## Beater Motor

Two, 2 hp

## Electrical

|                    | Max Fuse Size | Min Circuit Ampacity | Poles (P) Wires(W) |
|--------------------|---------------|----------------------|--------------------|
| 208-230/60/1 Air   | 45            | 38                   | 2P, 2W             |
| 209-230/60/1 Water | 45            | 36.5                 | 2P, 2W             |
| 208-230/60/3 Air   | 30            | 27                   | 3P, 3W             |
| 208-230/60/3 Water | 30            | 26.5                 | 3P, 3W             |

## Exterior Space Required

**Air Cooled :** 6" (15.3 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



DISTRIBUTOR



LOCATOR

\*Customer is responsible for complying with local refrigeration regulations.  
08/2026

Electro Freeze® / H.C. Duke & Son, LLC | 2116 8th Ave, East Moline, 61244 | 309.755.4553 | sales@electrofreeze.com | www.electrofreeze.com