



MODEL 812H

GRAVITY SLUSH & FROZEN BEVERAGE FREEZER

FEATURES

This extreme capacity freezer delivers frozen beverages quickly with minimal labor; helping operators save on labor costs while ensuring consistent quality in every pour.

High Capacity Hopper

Ensures fast, consistent dispensing of frozen beverages, maximizing output and minimizing downtime for high-volume operations.

Torque Control Technology

Maintains consistency & product texture.

Easy to Operate and Clean

Designed for reliability, minimizing downtime and maintenance.

Long Lasting Scraper Blades

Our durable scraper blades minimize replacements while ensuring a smooth, consistent texture for high-quality frozen treats.

Innovative Auger Technology

Gently blends to preserve texture, consistency, and quality.

Serve by the Drink or Pitcher

Dispense individual drinks or large pitchers with speed and precision; ensuring seamless service during peak hours.

Mix Level Indicator

A built-in flashing alert system notifies operators when it's time to add mix to help maintain consistent product quality and efficient workflow.

Flavor Rack

Holds 5 bottles to provide flavor options while running a neutral or core base.




PERFECT FOR

- High Traffic Venues
- Quick Service Restaurants
- Resorts
- Bars





MODEL 812H SPECIFICATIONS

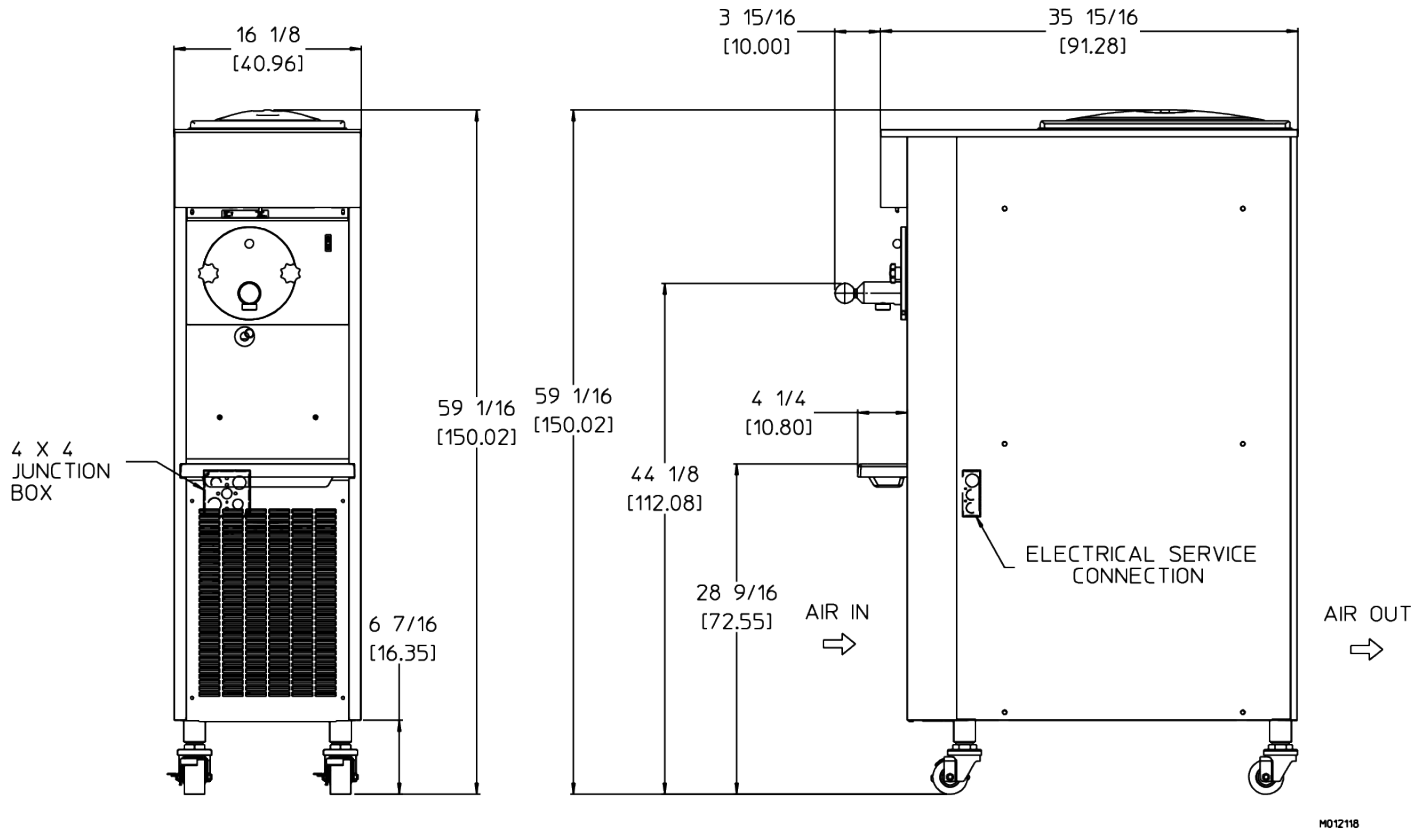

Weight

Net	525 lbs	238.1 kg
Crated	597 lbs	270.8 kg

Volume

58.4 cubic ft	1.65 cubic m
---------------	--------------

Dimensions

16-1/8" x 35-15/16" x 59-1/16"
40.96 cm x 91.28 cm x 150.02 cm

Mix Hopper Capacity

One - 20 qts (18.8 liters) each

Freezing Cylinder Capacity

One - 12 qts (11.4 liters) each

Beater Motor- Qty, hp

One, 1/2 hp

Refrigerant Types*

One, 21,000 Btuh
R404a R452a

*Customer is responsible for complying with local refrigeration regulations.

Electrical

	Max Fuse Size	Min Circuit Ampacity
208-230/60/1 Air	35	25.5
209-230/60/1 Water	35	24

Exterior Space Required

Air Cooled : 6" (15.2 cm) air space required on rear panel for circulation

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



DISTRIBUTOR



LOCATOR