



MODEL GES-5400

PRESSURIZED SOFT SERVE FREEZER

FEATURES

This high-capacity soft serve freezer produces two independent flavors and a perfectly blended twist for added variety.

Twist Feature

Dispenses two separate flavors or an equal combination of both; providing versatile menu options.

Precision Control

The Virtual Quality Management System™ monitors temperature to ensure superior taste and quality.

Patented Mix Transfer System

The simplest and most reliable pressurized system available for consistent product flow.

Flexible Mix Holding System

Pumps mix directly from bags or containers for seamless operation.

Scroll Compressor Technology

Increases capacity, reliability, and efficiency for continuous service.

Innovative Auger Technology

Gently blends for optimal texture and consistency.

Long Lasting Scraper Blades

Durable reversible scraper blades minimizes replacements and ensures a smooth, consistent texture for premium-quality frozen treats.

Standby Mode

Reduces energy costs while maintaining safe product storage during non-business hours.

Pump Forward Design

Reduces cleaning time; minimizing downtime and maximizing efficiency.




PERFECT FOR

- Custard Shops
- Sports Arenas
- Stadiums





MODEL GES-5400 SPECIFICATIONS

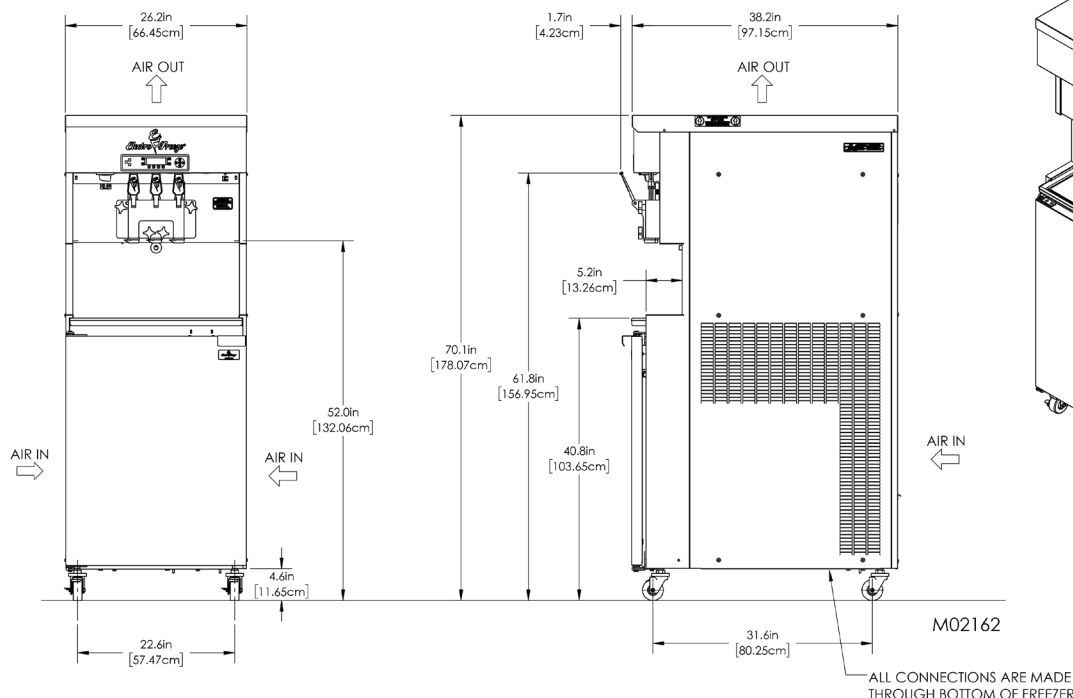

Weight

Net	914 lbs	414 kg
Crated	1015 lbs	460 kg

Volume

58.42 cubic ft 1.65 cubic m

Dimensions

26.2" x 38.2" x 70"

66.43cm x 97.15cm x 178.07cm

Freezing Cylinder Capacity

Two - 5 qts (4.7 liters) each

Mix Hopper Capacity

Two - 30 quarts (28.4 liters) each

Refrigerant Types*

Two, 11,000 Btuh
R404a R452a

Separate Cabinet Refrigerant

One, 1,200 Btuh
R134a

Beater Motor

Two, 2 hp

Electrical

	Max Fuse Size (L/R)	Min Circuit Ampacity (L/R)	Poles (P) Wires(W)
208-230/60/1 Air	35/40	27.5/29	2P, 2W
208-230/60/1 Water	35/35	25.5/27.5	2P, 2W
208-230/60/3 Air	25/25	20 (2)	3P, 3W
208-230/60/3 Water	20/25	17.5/19	3P, 3W

Exterior Space Required

Air Cooled : 6" (15.2 cm) air space required at rear panel or both side panels and 24" (61 cm) air space above unit for circulation

Optional Features

Remote Air Cooled System: additional configuration required, contact Electro Freeze® for more information

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



DISTRIBUTOR



LOCATOR

*Customer is responsible for complying with local refrigeration regulations.

08/2026

Electro Freeze® / H.C. Duke & Son, LLC | 2116 8th Ave, East Moline, 61244 | 309.755.4553 | sales@electrofreeze.com | www.electrofreeze.com